


Clear reinforced mesh sheet for heat-resistant

Keeping weight & flexibility under high temperature environment(80degC~120degC)

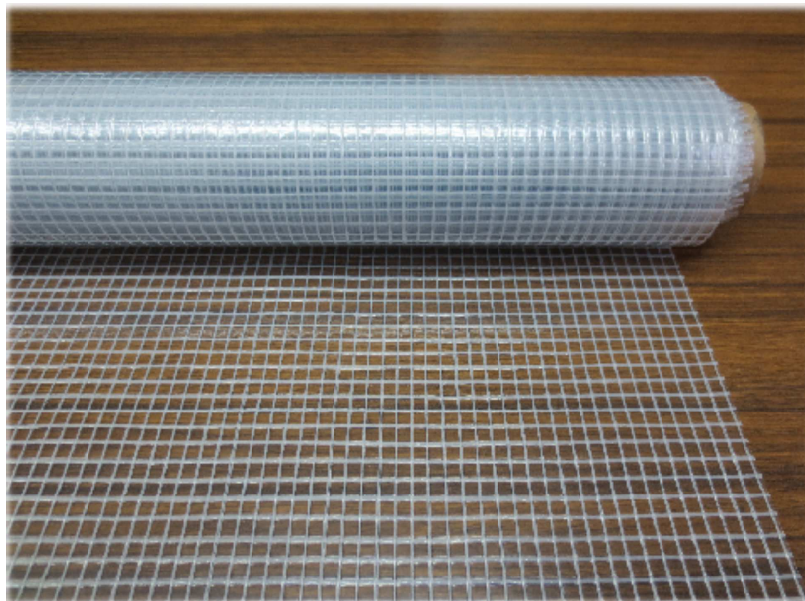

Product feature

Well heat resistance

It is able to use under 120 degC environment

Keep weight & flexibility

Not-sticky

It is not sticky so much, comfortable use

Excellent in flame retardance

Usage

Partition curtain, cover, etc

Well Visibility

Secure the safety of workplace since it has well transparency even with reinforcing mesh

Stable in dimensions

it is stable in dimensions with reinforcing mesh

Size of original roll

Size of original roll:

Thickness 0.46mm

W2050mm x 30M/per roll


Weight 360g/m²

Mesh size 4mm

Clear reinforced mesh sheet test result

Test Item	Result	Remarks
Tensile strength Warp N/3cm Weft	588 500	Correspondingly to JIS L 1096 A
Coeffient of extension (%) Warp Weft	17 27	Correspondingly to JIS L 1096 A
Tearstrength(N) Warp Weft	441 441	Correspondingly to JIS L 1096 C
Heat distortion rate %	1.1%	120°C One hour
Shrinking % (100°C)	1.2%	100°C two weeks

Above values are measurement value only, and are not guaranteed

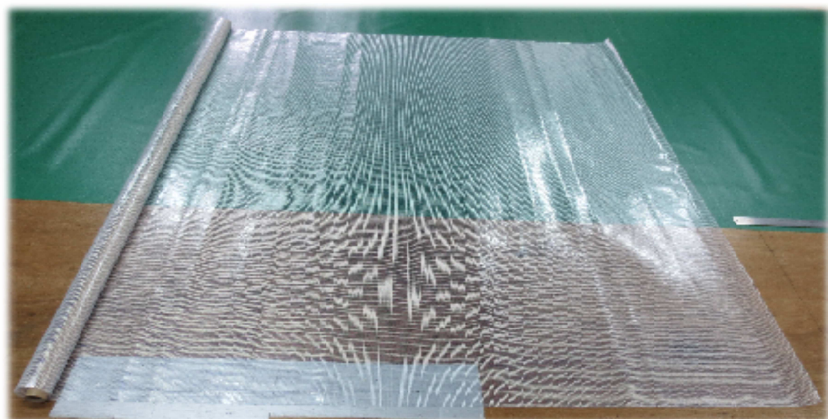

Inquiry :

KIKUCHI SHEET KOGYO CO.,LTD.
3-7-34 Imazunaka Tsurumiku Osaka-city
Osaka 538-0042 Japan