


Heat-resistant PVC transparent sheet

This product can be used at the ambient temperature of 120°C


試験1

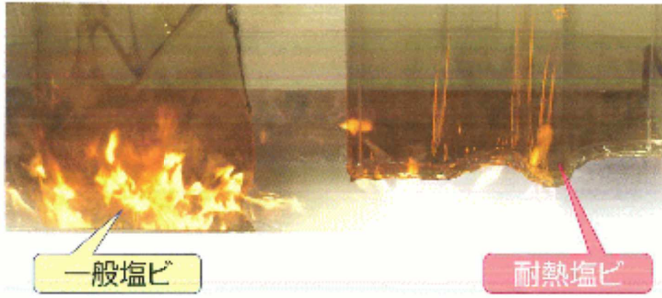

一般塩ビ

耐熱塩ビ

試験2

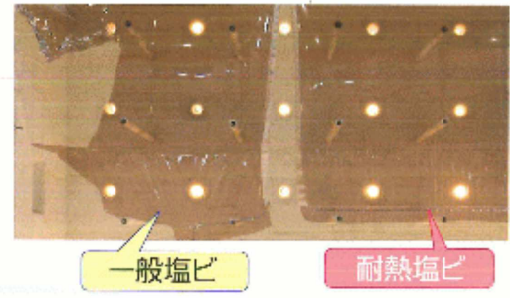

一般塩ビ

耐熱塩ビ

Test1 Left)General PVC / Right)This PVC


Test2 Same as test 1

This is curtain can be used at the ambient temperature of 120 deg C.

It is an unsurpassed transparent and heat-resistant curtain!

This enviromentally friendly product contains no phthalate compunds.

Highly reisant to heat (it can be used at the temperature of 120 deg C) and excellent in flame retardance(it is a self-extinguishing material, thus fire does not spread in case of burning)

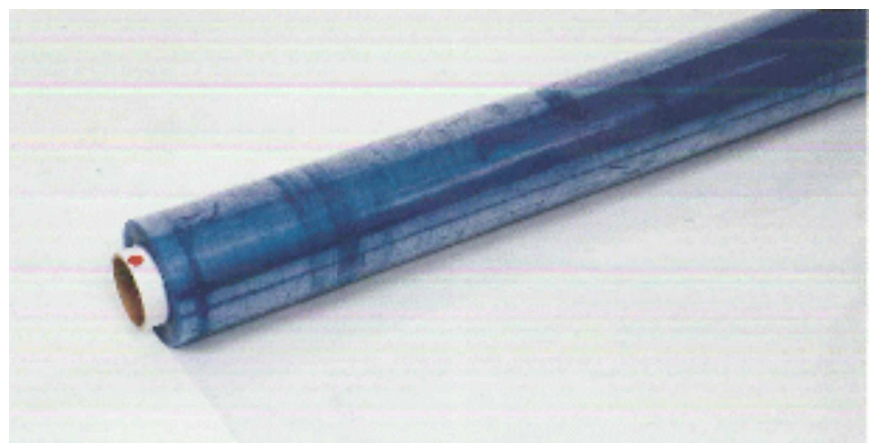

Size per roll:
0.3mm thickness
Width 1070mm x Length 30M/roll

Usege :
At food plants, welding & injection forming shops, etc.

Test Items	Transparent 0.3mm	Remarks
Hardness(JKS A hardness scal	90	
Tensile strength longitudinal	92	Correspondingly to JIS K6732
lateral	86	
coefficient of extension (%) longitudinal	300	Correspondingly to JIS K6732
lateral	350	
Tear strength(N) longitudinal	22	Correspondingly to JIS K6732
lateral	20	
heat distortion rate %	4.5	120°C
brittle temperature°C	-18	Correspondingly to JIS K7201
flameproofness	conformity	fire defense Construction rule under the provision of Article 4, paragraph (3)

* Values inside this product specification are indicated only for reference, and are not guaranteed.

Inquiry :

KIKUCHI SHEET KOGYO CO.,LTD.
3-7-34 Imazunaka Tsurumi-ku Osaka-city
Osaka, 538-0042, Japan
+81-6-6961-6893(tel) +81-6-6961-6895(fax)