

"Sound-insulated Halfclear" "Sound-insulated translucent sheet" Thickness 1mm

Thickness 1mm



■ As for factory partitions and gateways,
noise prevention around machines



**Sound-insulated translucent sheet
(Thickness 1mm)**

● **Lighting performance:**

The excellent lighting performance
The total light transmittance is 47%

● **Sound-insulation :**

Its sound insulation property is excellent,
equivalent to that of general sound
insulating sheets.

● **Highly strong :**

Highly strong, hard to tear and
highly durable.

● **Workability :**

Excellent workability
(e.g.welding and printing)

● **Flame-proofness :**

Flame proofness: It is certified by
the Japan Fire Retardant Association.

● **Water-repellent :**


With the ground fabric water-repellent,
fiber inside the sheet does not go moldy.

※Thickness 1mm

※Weight 1192g/m²

※Size W1880mm x L28M /per roll

※Flame proofness certified product

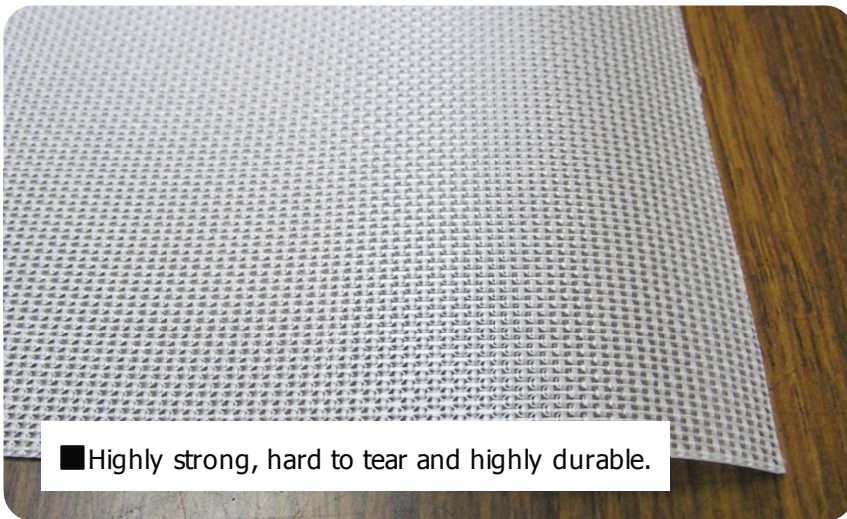

■ Highly strong, hard to tear and highly durable.

**Dedicated double-sided
adhesive tape**



Tape Size:

W25mm x L10M

One side strong adhesive,
the other side weak adhesive.
(No adhesive deposit)

Sound transmission loss data						unit: dB
frequency	125	250	500	1K	2K	4K
transmission loss	6	8	11	16	21	26

Tensile strength (N/3cm)		Coefficient of extension (%)		Tear strength (N)	
Warp	Weft	Warp	Weft	Warp	Weft
1790	1542	24	33	662	672

Inquiry :

GIKUCHI SHEET KOGYO CO.,LTD.
3-7-34 Imazunaka Tsurumi-ku Osaka-city
Osaka 538-0042 Japan