Sound insulated "Non-clear"sheet Offwhite Sound insulated Opaque sheet Thickness 1.3mm







Sound-insulated"Non-Clear"sheet (Sound insulated Opaque sheet t:1.3mm)

• Material:

Bath cloth- Polyester Resin - Polyvinyl chloride(PVC)

Roll size:

W 970mm x L10.5M(tolerance ± 0.5 M) Thickness :1.3mm weight : 2000g/m²

Sound-insulation effect:

There is 20dB high sound insulation effect in 1000Hz frequency range!

Durability:

Base cloth made by weaved highly strong polyester fiber laminated with particular composition resin.


• Flameproofness:

It is flameproofness, passed defined standards of the Fire Service Act; Japanese fire defence law.

•Color:

Off white color easily matches ambient srroundings.

Sound transmission loss dB(as the vertical axis)

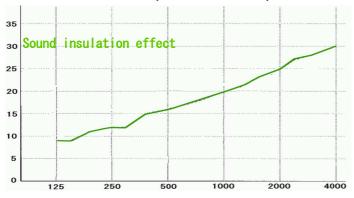

Central frequency Hz(as the horizotal axis)

Sound tra	Sound transmission loss					
frequency	125	250	500	1K	2K	4K
transmission loss	9	12	16	20	25	30

Tensile strength (N/3cm)		Coefficient extension (°		Tear strength (N)	
Warp	Weft	Warp	Weft	Warp	Weft
2000	1900	20	26	600	700

Inquiry:

KIKUCHI SHEET KOGYO CO.,LTD. 3-7-34 Imazunaka Tsurumi-ku Osaka-city Osaka 538-0042 Japan